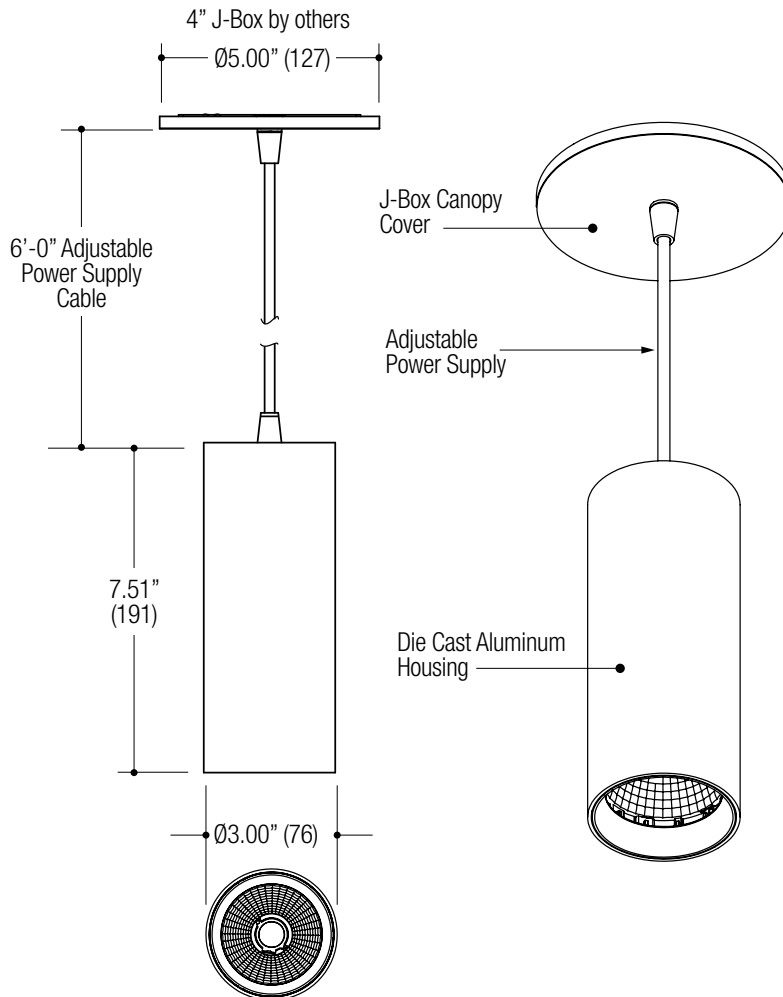


PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Measurements in () are metric equivalents.



Specifications

PENDANT HOUSING

- Single downlight accent fixture / small size
- 3.00" Diameter cylindrical shape
- Die cast aluminum housing
- LED optical grade reflector
- 5" diameter canopy
- Powder coat finish

LED SOURCE

- CREE
- ValuDIM™ Warm dimming
- Field replaceable optics available
- Will accept 1 lens and 1 louver
- Through ventilation passively cooled thermal management

ELECTRICAL

- Fully integral LED driver
- Phase dimmable or 0-10V power supply

MOUNTING

- Directly to junction box
- Surface canopy with 6' adjustable cable and hardware supplied

LABELS

- Suitable for damp location



ValuDIM™





5 YEAR WARRANTY

Limited

ORDERING INFO

SERIES	WATTAGE	CRI / COLOR	BEAM	POWER SUPPLY	FINISH
LANRPB LANIE PENDANT Small Downlight	08C 08W LED 914 lm del.	8027 80CRI / 2700K 8030 80CRI / 3000K	N Narrow 13° M Medium 25° W Wide 36° V Very Wide 51°	DMU Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V)	BB Matte Black WW White Consult factory for custom colors.
	13C 13W LED 1230 lm del.	8035 80CRI / 3500K 8040 80CRI / 4000K 9227 92CRI / 2700K 9230 92CRI / 3000K 9235 92CRI / 3500K 9240 92CRI / 4000K			
	19C 19W LED 1768 lm del.				
	26C 26W LED 2377 lm del. Delivered @ 80CRI / 3000K Narrow Beam				
	ValuDIM™ 15V 15W LED / 813 lm del. / 3000-1800K Warm Dimming Delivered @ 92CRI / 3000K Narrow Beam	9220 92CRI / 3000-1800K Warm Dimming (ValuDIM Only)	ValuDIM™ N Narrow 17° M Medium 25° W Wide 38°		

Ordering Example: **LANRPB-13C-8030-M-DMU-BB**

OPTICAL ACCESSORY	DESCRIPTION	LIGHT SOURCE
		SMALL
		• 65mm LED
	Diffusion Lens	OPT-TRA20B-P-DFL Ø2.60" (65mm) nom.
	Linear Spread Lens	OPT-TRA20B-P-LSL Ø2.60" (65mm) nom.
	Prismatic Spread Lens	OPT-TRA20B-P-PSL Ø2.60" (65mm) nom.
	Hex Cell Louver	OPT-TRA20B-HXL Ø2.60" (65mm) nom.

* Other filters, colored glass, dichroics & micro-lenses available upon request