
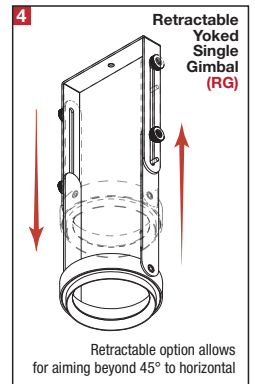
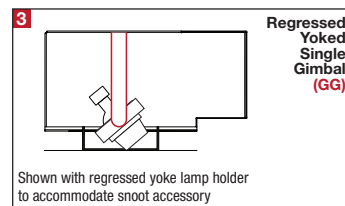
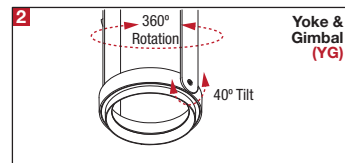
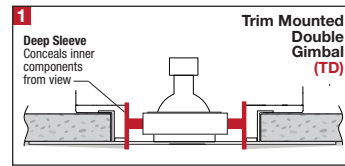


| | | |
|---------|------|----------------|
| PROJECT | TYPE | CATALOG NUMBER |
|---------|------|----------------|

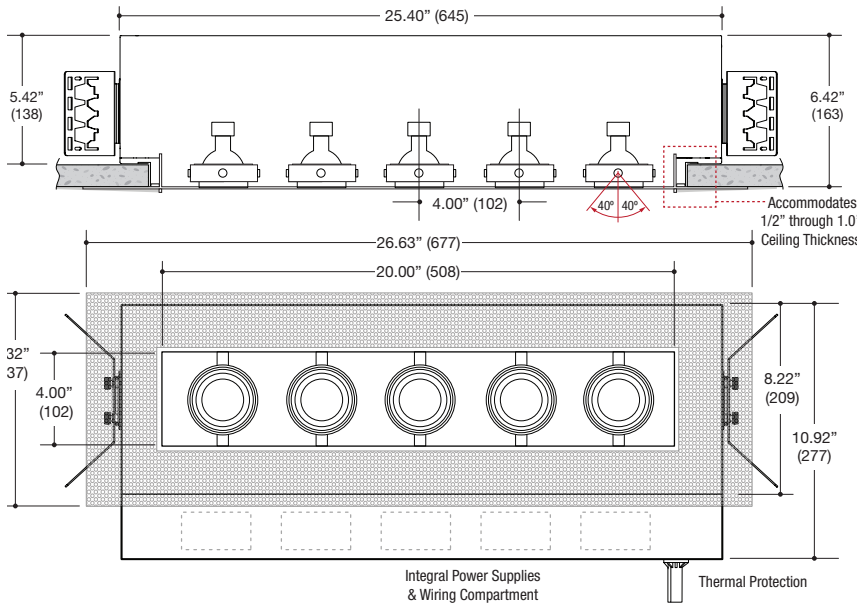

DESCRIPTION

- Five light recessed accent / downlight - small size
- All steel 18GA construction with powder coat finish
- Trimless insert with 4" x 20" open aperture
- Perforated metal mesh frame for mudding right to the aperture
- Vent holes for cooler operating temperature
- Trimless insert features deep sleeve to conceal inner components
- Insert sleeve removable for maintenance
- **Ceiling Cut-Out - 5.12" x 21.12"**

LAMPS (not included)

- 12V MR16 50W max - Derate Labels Available
- CMHMR16 in 20W or 39W
- LED Retrofit 15W max - Works with SORAA®
- Double gimbal lamp holder with up to 40° x 40° tilt aiming
- Trim mounted double gimbal standard with optional single gimbal flush yoke, regressed yoke or adjusting retractable yoke

ELECTRICAL

- Integral electronic or toroidal transformer, metal halide ballast
- Electrical wiring compartment integrated into housing construction
- Thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Dimmable (12V)

MOUNTING

- Butterfly brackets for commercial installation in drywall and other mud in ceiling types
- Continuously variable plate adjusts for 1/2" through 1.0" ceilings
- Heavy -Duty **L-Bars™** hanger bar system ordered separately
LF #LBARS4PK

LABELS








- Suitable for damp location



ORDERING INFO

| SERIES | WATTAGE / LAMP | LAMP ASSEMBLY | POWER SUPPLY | VOLTAGE | FINISH | OPTIONS |
|---|---------------------------------------|--|---|---------------|------------------|---------------------------|
| MF35BN-S MULTIFORMS MF300 Series Recessed 5-Light Straight Aperture Adjustable Accent Trimless Fixture New Construction Housing | 020MR16X MR16 20W | TD Trim Mounted Double Gimbal | ET Electronic Transformer | 1 120V | BB Black | CP Chicago Plenum |
| | 035MR16X MR16 35W | YG Yoke Gimbal Flush to Ceiling Line | TT Q-Tran Toroidal Transformer | 2 277V | WW White | EM Emergency Relay |
| | 050MR16X MR16 50W | GG Regressed Yoked Gimbal* | EB Electronic Metal Halide Ballast | | SS Silver | |
| | 039CM16X 39W CMHMR16 | RG Retractable Yoked Gimbal | | | XX Custom | |
| | 015MR16X MR16 15W LED Retrofit | * Required to enable flush appearance with snoot accessory | | | | |
| MF35BN-S | | | | | | |

Ordering Example: **MF35BN-S-050MR16X-YG-TD-1-BB-CP**

| OPTICAL ACCESSORY | DESCRIPTION | LIGHT SOURCE |
|---|---------------------------------|---|
| | | SMALL |
| | | <ul style="list-style-type: none"> • MR16 • CMHMR16 • 50mm LED |
|  | Clear Lens | OPTB-CLR |
| | Clear Lens - LED Film | OPTB-L-CLR |
|  | UV Lens | OPTB-UVL |
|  | Hex Cell Louver | OPTB-HXL |
|  | Diffusion Lens | OPTB-DFL |
| | Diffusion Lens - LED Film | OPTB-L-DFL |
|  | Linear Spread Lens | OPTB-LSL |
| | Linear Spread Lens - LED Film | OPTB-L-LSL |
|  | Prismatic Spread Lens | OPTB-PSL |
|  | Snoot - Black | OPTB-SNB |
| | Snoot - White | OPTB-SNW |
| | Snoot - Silver | OPTB-SNS |
| | Snoot - White With Black Splay | OPTB-SNWB |
| | Snoot - Silver With Black Splay | OPTB-SNSB |

* Other filters, colored glass, dichroics & micro-lenses available upon request