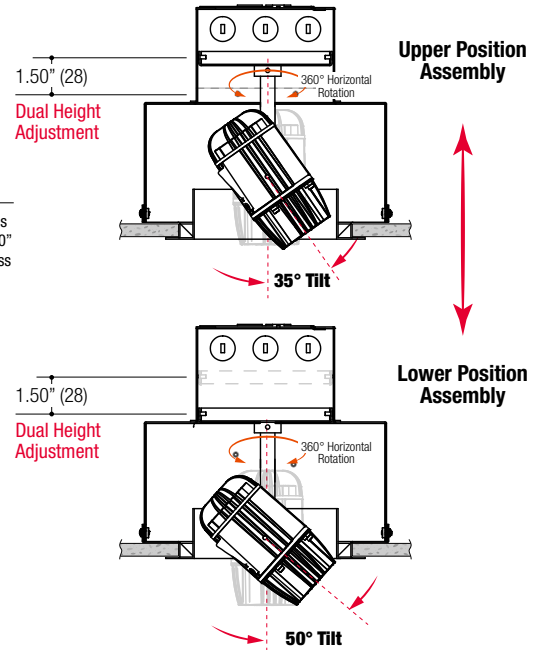
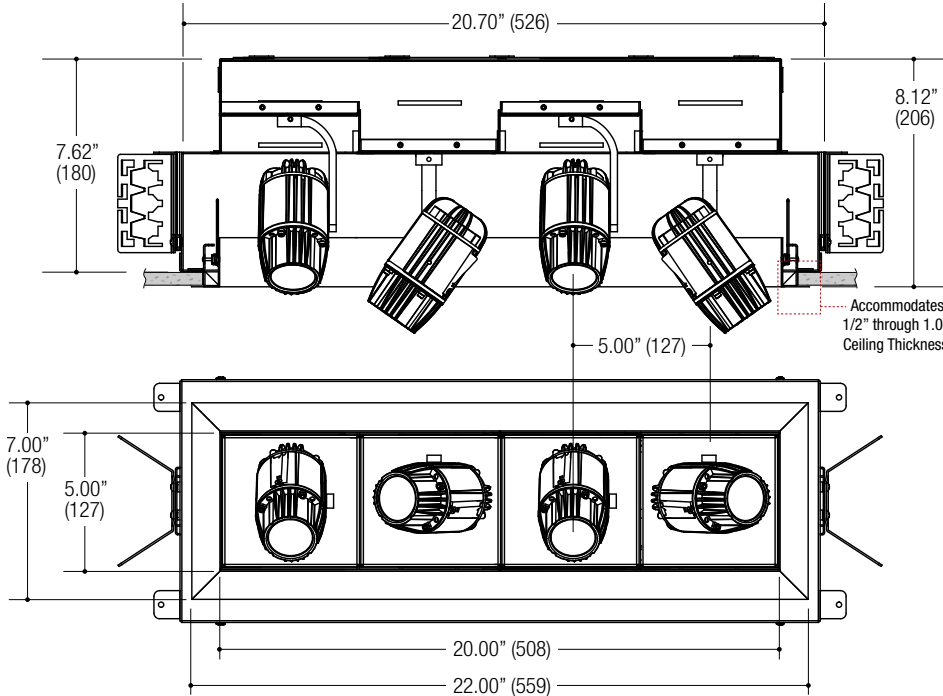


PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Measurements in ( ) are metric equivalents.

## 17Watts / 1280 Lumens



#### DESCRIPTION

- Four light recessed accent / downlight - small size
- All steel 18GA construction with powder coat finish
- 1" Trim flange with 5.00" x 20.00" open aperture
- Trim flange removable for maintenance
- **Ceiling Cut-Out - 6.20" X 21.25"**

#### LED SOURCE

- CREE
- 17W / 1280lm, 80CRI min / 4000K
- PHILIPS - CRISP WHITE
- 17W / 880lm, 90CRI / 3000K
- Field replaceable optics, 15°, 24°, 35° and 51° distribution
- 4 selectable light levels via push button
- 360° horizontal rotation with variable tilt
- Dual (2) height adjustments / 2 max. tilt options
- Will accept 1 additional media accessory

#### ELECTRICAL

- Fully integral LED driver
- Electrical wiring compartment integrated into housing construction
- Thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Phase dimmable power supply

#### MOUNTING

- Butterfly brackets for commercial installation in drywall, wood, stone, acoustic tile, or other ceiling types
- Continuously variable - adjusts for 1/2" through 1.0" ceilings

#### LABELS

- Suitable for dry location







**5 YEAR WARRANTY**  
Limited



#### ORDERING INFO

SERIES	WATTAGE	CRI / COLOR	BEAM	POWER SUPPLY	VOLTAGE	FINISH
<b>MF54BN-T</b>	<b>17C</b> 17W LED 1280 lm nom.	<b>8027</b> 80CRI / 2700K <b>8030</b> 80CRI / 3000K <b>8035</b> 80CRI / 3500K <b>8040</b> 80CRI / 4000K <b>9527</b> 95CRI / 2700K <b>9530</b> 95CRI / 3000K	<b>N</b> Narrow 15° <b>M</b> Medium 24° <b>W</b> Wide 35° <b>V</b> Very wide 51°	<b>D1</b> Reverse Phase Dimming (120V only) <b>D2</b> 0-10V Dimming Driver	<b>1</b> 120V <b>U</b> 120-77V	<b>BB</b> Black <b>WW</b> White <b>SS</b> Silver
<b>MULTIFORMS MF500 Series</b> Recessed 4-Light Trackhead Style Adjustable Accent Trimmed Fixture New Construction Housing	<b>17W</b> 17W LED 880lm nom. Crisp White	<b>9030</b> 90CRI / 3000K				

Ordering Example: **MF54BN-T-17C-8030-N-D1-1-BB**

OPTICAL ACCESSORY	DESCRIPTION	LIGHT SOURCE
		MINI / SMALL
	Clear Lens	OPTB-CLR Ø2.00" (51mm) nom.
	Clear Lens - LED Film	OPTB-L-CLR Ø2.00" (51mm) nom.
	UV Lens	OPTB-UVL Ø2.00" (51mm) nom.
	Hex Cell Louver	OPTB-HXL Ø2.00" (51mm) nom.
	Diffusion Lens	OPTB-DFL Ø2.00" (51mm) nom.
	Diffusion Lens - LED Film	OPTB-L-DFL Ø2.00" (51mm) nom.
	Linear Spread Lens	OPTB-LSL Ø2.00" (51mm) nom.
	Linear Spread Lens - LED Film	OPTB-L-LSL Ø2.00" (51mm) nom.
	Prismatic Spread Lens	OPTB-PSL Ø2.00" (51mm) nom.

\* Other filters, colored glass, dichroics & micro-lenses available upon request