
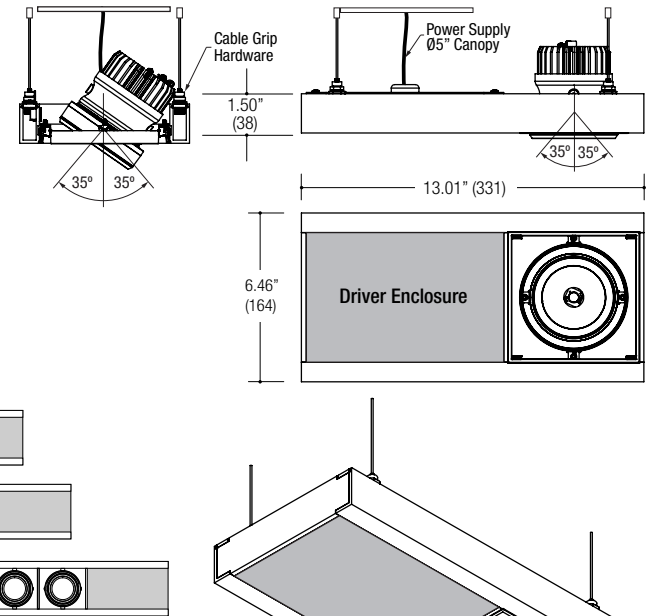


PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

CONFIG	A	B
11	13.01" (331)	6.46" (164)
12	18.15" (5461)	6.46" (164)
13	30.97" (787)	6.46" (164)
14	36.11" (917)	6.46" (164)
15	56.24" (1429)	6.46" (164)
16	61.38" (1559)	6.46" (164)
18	71.84" (1825)	6.46" (164)

Measurements in ( ) are metric equivalents.

## Specifications

### CONSTRUCTION

- Horizontal surface-mount suspended ceiling fixture
- All aluminum construction with powder coat finish
- 1.50" x .75" extruded frame
- .188" thick aluminum cross blades
- Perforated driver enclosure for cooler operating temperature
- Frame mounted double gimble LED source
- Lockable 35° x 35° tilt aiming
- Powder coat finish

### LED Source

- Field-replaceable integral LED module
- Field-changeable optic
- CREE
- Accepts up to 2 or more optical accessories



### ELECTRICAL

- Field-replaceable integral LED driver
- Electrical wiring compartment integrated into housing construction
- Thermal protection
- Easy maintenance access
- Optional dimming

### MOUNTING

- Suspended ceiling mount
- 6' aircraft cable with cable grip hardware

### LABELS

- Suitable for damp location

5 YEAR WARRANTY









Limited



### ORDERING INFO

SERIES	CONFIG	LED MODULE WATTAGE AND INFORMATION	CRI / COLOR	BEAM	DRIVER / VOLTAGE	FINISH	OPTIONS
<b>PNH-C</b>  MEDIUM SUSPENDED MULTIFORMS Horizontal Suspension Integral Drivers	11	CREE	8027 80CRI / 2700K	N Narrow 15°	DMU Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V)	BB Black WW White SS Silver XX Custom	EM Remotely Mounted Emergency LED Inverter. (Intended for 1 light - Field wiring required)
	12	19C 19W LED / 2163lm	8030 80CRI / 3000K	M Medium 30°			
	13	26C 26W LED / 2908lm	8035 80CRI / 3500K	W Wide 41°			
	14		8040 80CRI / 4000K	V Very Wide 70°			
	15	Delivered @ 80CRI / 3000K Narrow Beam	9227 92CRI / 2700K				
	16		9230 92CRI / 3000K				
	18		9235 92CRI / 3500K 9240 92CRI / 4000K				
<b>PNH-C</b>							

Example: **PNH-C-12-26C-8027-N-DMU-BB-EM**

OPTICAL ACCESSORY	DESCRIPTION	LIGHT SOURCE
		MEDIUM
		<ul style="list-style-type: none"> <li>• PAR20</li> <li>• PAR20CMH</li> <li>• T4GU6.5</li> <li>• 70mm LED</li> </ul>
	Clear Lens	OPTCN-CLR
	UV Lens	OPTCN-UVL
	Hex Cell Louver	OPTCN-HXL
	Diffusion Lens	OPTCN-DFL
	Diffusion Lens - LED Film	OPTCN-L-DFL
	Linear Spread Lens	OPTCN-LSL
	Linear Spread Lens - LED Film	OPTCN-L-LSL
	Prismatic Spread Lens	OPTCN-PSL
	Snoot - Black	OPTCN-SNB
	Snoot - White	OPTCN-SNW
	Snoot - Silver	OPTCN-SNS
	Snoot - White With Black Splay	OPTCN-SNWB
	Snoot - Silver With Black Splay	OPTCN-SNSB
	Narrow Beam 14°	OPTCN-REFLN
	Medium Beam 30°	OPTCN-REFLM
	Wide Beam 40°	OPTCN-REFLW
	Very Wide 70°	OPTCN-REFLV

\* Other filters, colored glass, dichroics & micro-lenses available upon request