
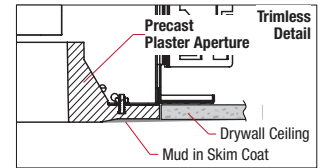
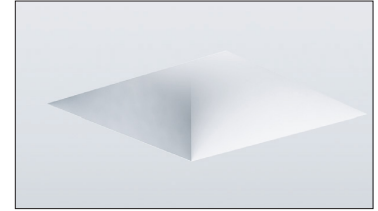
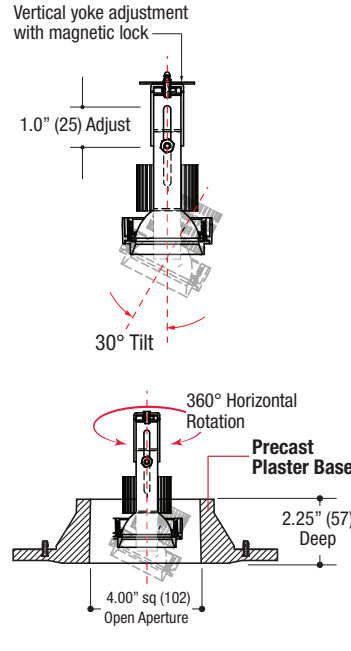
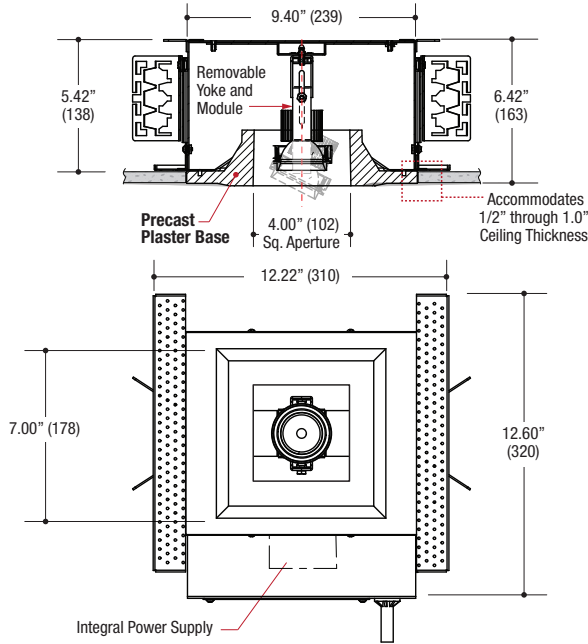


PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------



## Specifications

### SQUARE TRIMLESS DOWNLIGHT

- Housing of all steel construction
- White powder coat finish
- 4.00" square x 2.25" deep aperture of precast plaster
- **Ceiling Cut-out - 9.62" x 8.50"**

### LED SOURCE - See wattage schedule below

- ValuDIM™
- CREE
- Accepts up to 2 or more optical accessories



### ELECTRICAL

- Field-replaceable integral LED driver
- Electrical wiring compartment integrated into housing construction
- Internal thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Optional dimming

### MOUNTING

- Butterfly brackets for commercial installation in drywall and other mud in ceiling types
- Perforated plate adjusts for 1/2", 5/8", 3/4" & 1.0" ceiling thickness
- Includes Heavy-Duty L-Bars™ hanger bar system for residential installation

### LABELS








- Suitable for damp location
- **IC rated / Air-Tight / Title 24 Compliant**



### ORDERING INFO

HOUSING SERIES	WATTAGE	CRI	COLOR	BEAM	MECHANISM	DRIVER	FINISH	OPTIONS
<b>VF3S-1BA-S</b>	<b>ValuDIM™</b> <b>15V</b> 15W LED (876lm) del. 3000-1800K Warm Dimming	<b>92</b> 92 CRI	<b>20</b> 3000-1800K	<b>N</b> Narrow 17° <b>M</b> Medium 25° <b>W</b> Wide 38°	<b>AD</b> Adjustable	<b>DMU</b> Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V)	<b>WW</b> White	<b>IC</b> Insulated Ceiling
<b>VF300 SERIES</b> 4.00" Square Precast Plaster Trimless Aperture Adjustable Downlight New Construction Housing	<b>CREE</b> <b>08C</b> 08W LED (1094lm) del. <b>13C</b> 13W LED (1473lm) del. <b>19C</b> 19W LED (2117lm) del.	<b>80</b> 80 CRI <b>92</b> 92 CRI	<b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>N</b> Narrow 16° <b>M</b> Medium 28° <b>W</b> Wide 42°				
	Delivered @ 80CRI / 3000K Narrow Beam Fixed							

Order Example: **VF3S-1BA-S-08C-92-30-W-AD-DMU-WW-IC**

OPTICAL ACCESSORY	DESCRIPTION	LIGHT SOURCE
		SMALL
		<ul style="list-style-type: none"> <li>• MR16</li> <li>• CMHMR16</li> <li>• 50mm LED</li> </ul>
	Clear Lens	OPTB-CLR Ø2.00" (51mm) nom.
	Clear Lens - LED Film	OPTB-L-CLR Ø2.00" (51mm) nom.
	UV Lens	OPTB-UVL Ø2.00" (51mm) nom.
	Hex Cell Louver	OPTB-HXL Ø2.00" (51mm) nom.
	Diffusion Lens	OPTB-DFL Ø2.00" (51mm) nom.
	Diffusion Lens - LED Film	OPTB-L-DFL Ø2.00" (51mm) nom.
	Linear Spread Lens	OPTB-LSL Ø2.00" (51mm) nom.
	Linear Spread Lens - LED Film	OPTB-L-LSL Ø2.00" (51mm) nom.
	Prismatic Spread Lens	OPTB-PSL Ø2.00" (51mm) nom.
	Snoot - Black	OPTB-SNB Ø2.00" (51mm) nom.
	Snoot - White	OPTB-SNW Ø2.00" (51mm) nom.
	Snoot - Silver	OPTB-SNS Ø2.00" (51mm) nom.
	Snoot - White With Black Splay	OPTB-SNWB Ø2.00" (51mm) nom.
	Snoot - Silver With Black Splay	OPTB-SNSB Ø2.00" (51mm) nom.

\* Other filters, colored glass, dichroics & micro-lenses available upon request

©2016 LF ILLUMINATION LLC

We reserve the right to change or withdraw specifications without prior notice.

HEADQUARTERS  
9200 Deering Avenue  
Chatsworth CA 91311

Telephone: 818-885-1335  
Toll Free: 855-885-1335  
Fax: 818-576-1335

[www.lfillumination.com](http://www.lfillumination.com)  
rev: 012616