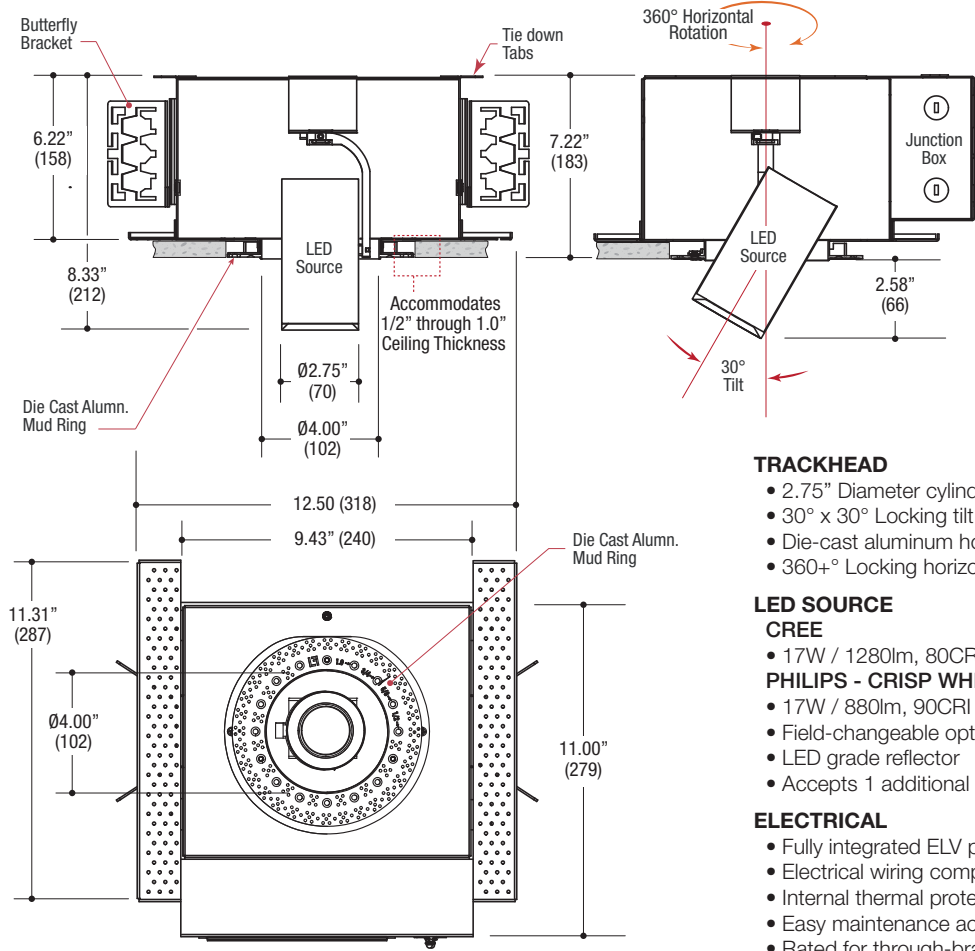


PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------



- TRACKHEAD**
- 2.75" Diameter cylindrical shaped
 - 30° x 30° Locking tilt aiming
 - Die-cast aluminum housing
 - 360+° Locking horizontal rotation

- LED SOURCE**
- CREE**
- 17W / 1280lm, 80CRI min / 4000K
- PHILIPS - CRISP WHITE**
- 17W / 880lm, 90CRI / 3000K
 - Field-changeable optics 15°, 24°, 35° and 51° distributions
 - LED grade reflector
 - Accepts 1 additional optical accessory

- ELECTRICAL**
- Fully integrated ELV phase dimmable LED driver
 - Electrical wiring compartment integrated into housing construction
 - Internal thermal protection
 - Easy maintenance access through ceiling opening
 - Rated for through-branch wiring

- MOUNTING**
- Butterfly brackets for commercial installation in drywall and other mud in ceiling types
 - Adjustable mud ring for 1/2", 5/8", 3/4" & 1.0" ceiling thickness
 - Optional hanger bar attachment for residential installation

- LABELS**
- Suitable for damp location
 - IC rated / Air-Tight / Title 24 Compliant






5 YEAR WARRANTY
Limited

- DESCRIPTION**
- One light semi-recessed accent downlight
 - Housing of all steel construction
 - Adjustable die cast aluminum mud ring
 - 4" Diameter open aperture
 - Powder coat finish
 - **Ceiling Cut-out - Ø6.50"**

ORDERING INFO

SERIES	WATTAGE	CRI / COLOR	BEAM	POWER SUPPLY	VOLTAGE	FINISH
VF9521 TURRET SERIES 4.00" Dia. Trimless Housing Semi-recessed downlight	17C 17W LED 1280 lm nom.	8027 80CRI / 2700K 8030 80CRI / 3000K 8035 80CRI / 3500K 8040 80CRI / 4000K 9527 95CRI / 2700K 9530 95CRI / 3000K	N Narrow 15° M Medium 24° W Wide 35° V Very wide 51°	D1 Reverse Phase ELV Dimming (120V only) D2 0-10V Dimming Driver	1 120V U 120-277V	BB Black WW White SS Silver
	17W 17W LED 880lm nom. Crisp White	9030 90CRI / 3000K				

Ordering Example: **VF9521-17L-8030-N-D1-1-BB**

OPTICAL ACCESSORY	DESCRIPTION	LIGHT SOURCE
		SMALL
		• 50mm LED
	Clear Lens	OPT-TRTRPB-CLR Ø2.31" (57mm) nom.
	Hex Cell Louver	OPT-TRTRPB-HXL Ø2.31" (57mm) nom.
	Diffusion Lens	OPT-TRTRPB-DFL Ø2.31" (57mm) nom.
	Diffusion Lens - LED Film	OPT-TRTRPB-L-DFL Ø2.31" (57mm) nom.
	Linear Spread Lens	OPT-TRTRPB-LSL Ø2.31" (57mm) nom.
	Linear Spread Lens - LED Film	OPT-TRTRPB-L-LSL Ø2.31" (57mm) nom.
	Prismatic Spread Lens	OPT-TRTRPB-PSL Ø2.31" (57mm) nom.

* Other filters, colored glass, dichroics & micro-lenses available upon request